

Uno



P-IMP-MKT-xxx · O124 EN










Uno (tesstone



Included

- Extra-flat shower tray
- Stainless steel drain cover
- High-flow linear drain 60 l/min
- Installation manual
- Cardboard packaging

Sizes and nominal weights approx (in kg)

- Widhts: 70, 80, 90 and 100 cm
 Lenghts from 100 to 200 cm
- Lenghts from 100 to 200 cm



Stone

Dimensional tolerance of ±5 mm.

Product characteristics

- · Completely flat on the underside
- Impact resistant
- Anti-slip Class 2 (UNE-41901)
- Anti-bacterial, preventing the proliferation of germs
- Totally waterproof
- Repairable

Finishes



B A	70	80	90	100
100	26	30	33	37
110	29	33	37	41
120	32	37	41	46
130	36	41	46	51
140	39	44	50	56
150	43	48	55	61
160	46	53	60	66
170	50	57	64	71
180	54	62	69	77
190	58	66	75	82
200	64	71	80	88


Customization





RAL

Drain included



CE High-flow linear drain 60 I/min (UNE-EN 274-2)


Drain cover



Customer service export@b10bath.com www.b10bath.com



(tesstone Uno

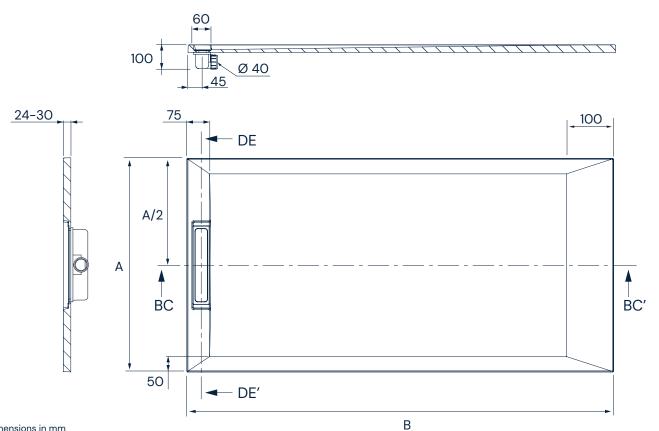

Dimensions in mm

Description of materials



Tesstone from b10 is a highly durable and resistant sustainable material made of natural mineral fillers and recycled recyclates from proximity composted with PET resins (24% recycled). The b10 Tesstone shower trays benefit from a double process of surface protection and finishing with ISO NPG gelcoat and PU cover, which gives them greater impermeability, inalterability over time, resistance, ease of maintenance and one of the most matte and natural finishes on the market.



Installation options







Installation characteristics

- . Installation recessed, above ground or raised
- Recommended adhesive type R-2-T (UNE-12004)
- Watertight seal with non-acetic silicone

Drops in sewage pipes should be at least 2%



Uno tesstone

Other properties

Declared benefits:

Characteristics essential	Submissions	Harmonised technical specifications	
Cleanability	Class 1	EN 14527:2016 + A1:2019	
Durability	Class 1	EN 14527:2016 + A1:2019	
Water Evacuation	Correct	EN 14527:2016	
Stability in the background	Correct	EN 14527:2016 + A1:2019	
Resistance to chemicals and dyes	Correct	EN 14527:2016 + A1:2019	
Resistance to temperature variations	Correct	EN 14527:2016	
Slip resistance	Class 2	UNE 41901	

Resistance to chemicals:

Tested product		Exposure time	Degradation	
Bleach		24h	5	
Salfuman			24h	5
Mr. Clean			24h	5
Viakal			24h	4
Vinegar			24h	4
Ammonia		24h	5	
KH-7		24h	5	
Cillit Bang		24h	5	
Acetone		1min	4	
Isopropanol		5min	5	
Nail polish		24h	4	
Medium colour hair dye		1h	4	
Dark colour hair dye		30min	5	
Lipstick		24h	5	
Oxygenated water		24h	5	
Betadine		24h	5	
Valuation	1	Surface degradation and/or blistering		
	2	Significant change in brightness and/or colour		
	3	Moderate change in brightness and/or colour		
	4	Slight change in brightness or colour, only visible from certain inspection angles		
	5	No visible change		

The data and characteristics indicated do not bind BAÑOS 10 S.L., which reserves the right to make any changes it deems appropriate, without being bound by it uppon prior notice or replacement. Valid data except error or omission.



Ctra. Onda - Vila-real, Km. 12,6 12200 Onda (Castellón) Spain +34 964 626 300

Customer service export@b10bath.com www.b10bath.com